


# 2CR5

• 6.0V • Wound (Spiral) type  
 • 2 x CR123A in series pack  
**Primary Lithium Manganese Dioxide Battery (Li-MnO<sub>2</sub>)**

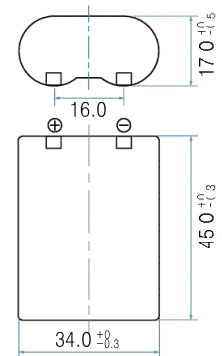

[Dimension in mm]

## Specifications

- Nominal voltage 6.0V
- Nominal capacity 1,400mAh (at 14mA, +20°C, 4.0V Cut Off)
- Max. continuous discharge current 1,200mA (to get 50% of the nominal capacity, +20°C, 4.0V Cut Off)
- Max. pulse discharge current 3,500mA
- Weight 37.9g
- Operating temperature range -30°C ~ +60°C
- IEC 2CP3845

## Key characteristics

- U.L. recognized (file number MH18384)
- ISO9001 approved
- Low self discharge rate (less than 1% after 1 year of storage at +20°C)
- Non restricted for transport


## Applications

- Camera • Utility metering
- Professional electronics


### Caution

Fire, explosion, and severe burn hazard. Do not recharge, crush, disassemble, heat above 212°F (100°C), incinerate, short circuit or expose contents to water. Keep battery out of reach of children and in original package until ready to use. Dispose of used batteries promptly.

Continuous Discharge at 20°C (68°F)

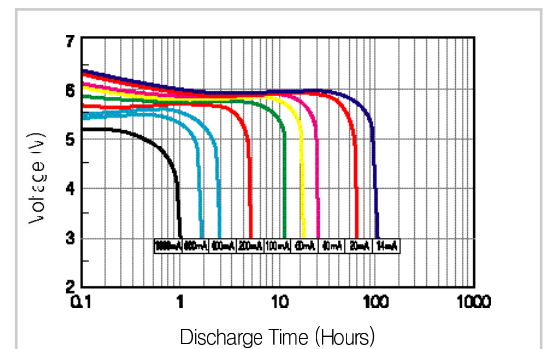

Delivered Capacity vs. Current

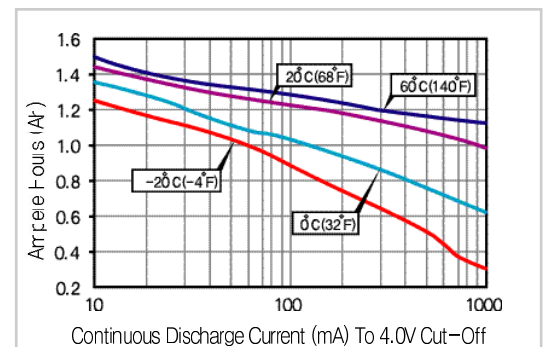

Relationship between Discharge Current and Duration time

